


REACH-IN FRIDGE

SPECIFICATION SHEET

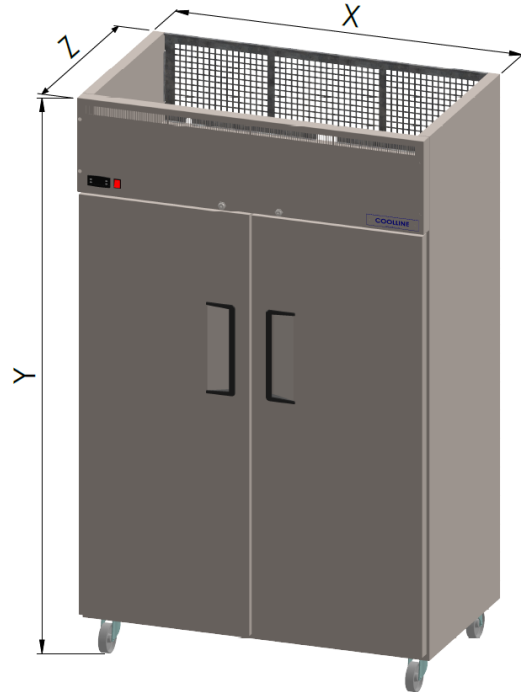

STANDARD FEATURES

- ✓ High Density 50-60mm Polyurethane Insulation
- ✓ Self-Closing Doors (door stays open after 90°)
- ✓ Temperature Range +1°C to +5°C
- ✓ Interior: 304 Stainless Steel
- ✓ Exterior Top: 430 Stainless Steel
- ✓ Exterior Sides: 430 Stainless Steel
- ✓ Exterior Back: Galvanized Steel
- ✓ Exterior Bottom: Galvanized Steel
- ✓ Heavy Duty Swivel Castors with Brakes
- ✓ Complies with SABS IEC 60 335-2-24
- ✓ Refrigerant R134a
- ✓ Anti-Sweat Breaker Strips
- ✓ Top Compressor Compartment
- ✓ Electronic Temperature Controller
- ✓ Digital Temperature Display
- ✓ Fan Assisted Blower Coil
- ✓ Automatic Condensate Evaporation
- ✓ Anti-Sweat Door Heaters
- ✓ Magnetic Sealing Doors
- ✓ Epoxy Coated Adjustable Shelving (4 per Door)
- ✓ Voltage 220 Single Phase
- ✓ LED Interior Light

OPTIONAL EXTRAS

- Additional Shelving

SIZE CHART

CODE	DESCRIPTION	HEIGHT (Y)	DEPTH (Z)	WIDTH (X)	VOLUME
RIF-01	1 DOOR REACH-IN FRIDGE	1960 mm (77.2 in)	750 mm (29.5 in)	700 mm (27.6 in)	600 L (21.2 cu. ft)
RIF-02	2 DOOR REACH-IN FRIDGE	1960 mm (77.2 in)	750 mm (29.5 in)	1220 mm (48 in)	1050 L (37 cu. ft)
RIF-03	3 DOOR REACH-IN FRIDGE	1960 mm (77.2 in)	750 mm (29.5 in)	1840 mm (72.4 in)	1600 L (56.5 cu. ft)

